


# Products datasheet



## UPRO 1/7W-G.NA

Schematic structure

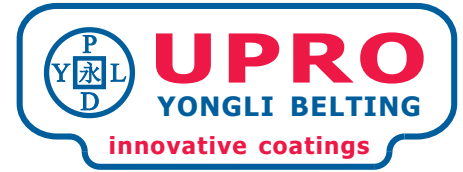

6D:391148

### Belt Applications

General conveying belt, Food industry

### Fabric information

Number of plies	1
Bottom fabric	<b>Polyester monofilament, with lateral stability</b>

### Basic technical data

Total thickness	<b>0.7 mm</b>	<i>0.028 in.</i>
Weight	<b>0.7 kg/M<sup>2</sup></b>	<i>0.14 lbs./sq.ft.</i>
Standard width	<b>3200 mm</b>	<i>126 in.</i>
Tension for		
1% elongation	<b>3 N/mm</b>	<i>17 lbs./ in.</i>

### Belt support

Roller	<b>Yes</b>
Silder bed	<b>Yes</b>
Troughed	<b>No</b>

### Minimum pulley diameter

Normal flection	<b>6 mm</b>	<i>0.24 in.</i>
Counter flection	<b>8 mm</b>	<i>0.31 in.</i>

### Suggested joint methods

**One ply finger**

### Detailed technical data

Top cover		
-Thickness	<b>0.2 mm</b>	<i>0.008 in.</i>
-Material	<b>Polyurethane</b>	
-Hardness	<b>Shore A86</b>	
-Color	<b>White</b>	
-Surface	<b>Smooth</b>	
Bottom cover		
-Thickness	-	
-Material	<b>Fabric impregnation PU</b>	
-Hardness	-	
-Color	<b>Transparent</b>	
-Surface	-	

### Chemical resistant and other characteristics

- \* Top cover permitted according to the FDA-prescriptions to paragraph 177.2600 for transport of all unpackaged foodstuffs
- \* Good resistance to animal, mineral and vegetable oil and fat
- \* Temperature range of -20°C to +80°C    -4°F to 176°F